

Datenblatt für Artikel: AC201642--

Sorolható szekrény 2 ajtós IP55 2000x1600x400mm acéllemez

RAL7035, szerelőlappal, 4 ponton záródó rudazat kihajtható karos zárral



SCHRACK-Info

- **Material** : Frame: 1.5 mm sheet steel. Doors: Single door and double door: 2 mm sheet steel. Rear, roof and side panels: 1.5 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with the **ACMPD002** accessory.

As insertion aid of the mounting plate we recommend the use of slide-in rails **ACCLT400** (for depth 400 mm), **ACCLT500** (for depth 500 mm), **ACCLT600** (for depth 600 mm) and **ACCLT800** (for depth 800 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure

- **Bottom plates** : 1 mm galvanised sheet steel, consists of
 - two-part bottom plate at depths 400 and 500 mm,
 - three-part bottom plate at depth 600 mm and
 - four-part bottom plate at depth 800 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels including the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever


- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Side panels** : ACSW... supplied in pairs as accessory. Mounting mark visible on the side of the frame profile
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Frame with fitted door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure to enable baying while still on the pallet. All packing material is recyclable. In 400 mm wide enclosures a mounting plate, bottom plates and door frame are not included
- **Mounting requirement** : Standard delivery ready for combined installation. For stand-alone installation add side panels



Technische Daten

Nettó szélesség (mm)	1.600,00
Nettó magasság (mm)	2.000,00
Nettó mélység (mm)	400,00
Nettó tömeg (kg)	170,40
Min. környezeti hőmérséklet (°C)	-10
Max. környezeti hőmérséklet (°C)	60
Védettségi fokozat	IP55
Érintésvédelmi osztály	I
Anyag	acéllemez
Szín	RAL 7035 (világos szürke)
Szélesség (mm)	1600
Magasság (mm)	2000
Mélység (mm)	400
Vázszerkezet anyagvastagság (mm)	1,50
Szerelőlap	horganyzott acéllemez, 3mm
Szerelőlap anyagvastagság (mm)	3
Ajtó falvastagság (mm)	2
Feneklemezek száma	4
Load capacity per door (kg)	100
Ajtók száma	2
Feneklemez szélesség (mm)	1430
Típus	sorolható szekrény
Total Load Capacity (kg)	1500
Mounting Plate Load Capacity (kg)	1500
Veszteségi teljesítmény (W)	-1312,00

Dimension drawing

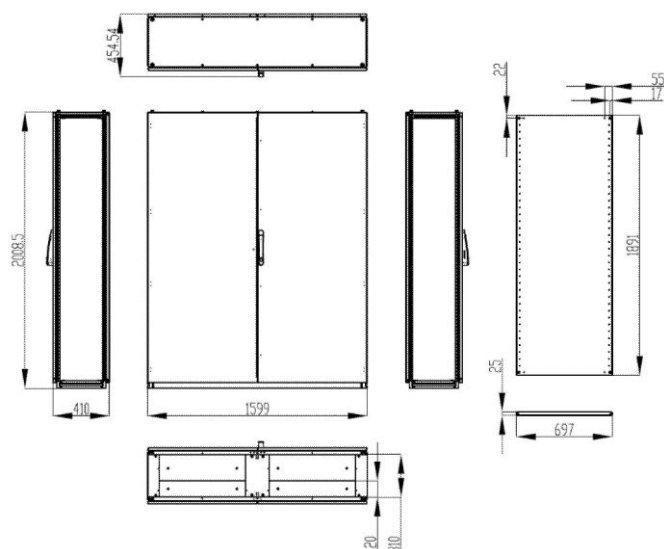

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Sorolható szekrény 2 ajtós IP55 2000x1600x400mm acéllemez RAL7035, szerelőlappal, 4 ponton záródó rudazat kihajtható karos zárral	AC201642
Választható tartozék	
LED light for EC, infra (not available in this country)	IU006519CZ
Oldallap (1 pár), 2000x400mm, acéllemez, RAL7035	ACSW2004
Tartó profil szerelőlaphoz, 400mm mély szekrényhez AC és KC szekrényekhez, CSE = 1 pár	ACCLT400
Soroló készlet, külső/belső, 4db soroló elem szerelési anyagokkal	ACCCI060
Tömítőszalag, polietilén, PE-01, IP55	ACSPDG01
Horganyzott emelőszem M12 AC és KC szekrény emeléséhez 4db	ACLE9301
Műanyag öntapadós tervtartó A4	ASDRA400
Kihajtható karos zár, betét nélkül, fekete without insert	ACLSC502
Félcilinder adapter ASLSC501-S-hez for push-pull handles of enclosure series AC, KC, AT and KT	ASLS2100
Adapter lemez nyomógomb betétéhez, AC/KC szekrény	ASLSSI537
Kalitkás anya M6, 10db	ACCNM615

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Választható tartozék	
Lencsfejű csavar M6x16mm (ISO 7380), 10 db PU=10 pieces	ACCNK006
Kalitkás anya M8, 10db	ACCNM815
Lencsfejű csavar M8x16mm (ISO 7380), 10 db PU=10 pieces	ACCNK008
DIN-sín alacsony, perforálatlan, horganyzott Ár darabonként	BK14004--B
DIN sín, perforált, Hossz=2000 SZÉ=35 MA=7,5mm Preis pro Stück	BK14005--A
DIN-sín magas, nem perforált, horganyzott Ár darabonként	IL14035--A
DIN-sín magas, perforált, 18x6.3mm horganyzott Ár darabonként	IL14037
Kulcs, kéttollú, 5mm csomagolási egység = 1 db	DV903532