

Felfűzhető áramváltó 1500A/5A, 65x32mm sínhez

Primer áram 1500A, Védettségi fokozat IP00 terminals, IP20 with terminal cover, Osztály 0,5



Technische Daten

Note

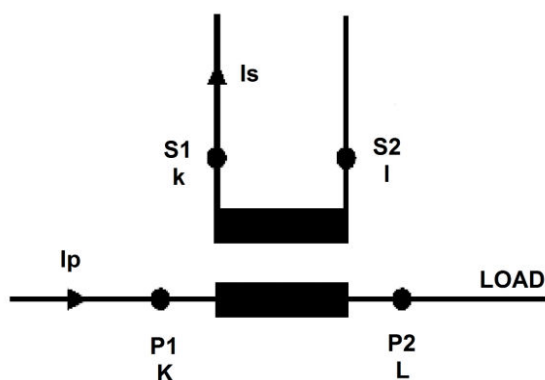
The converter is not allowed to be operated with open secondary side, because this leads to a dangerous overvoltage at the secondary side and overheating of the converter!!! (EN60044-1/A2)
Therefore, when disconnecting the measuring device, meter or power analyzer, short-circuit the secondary side.

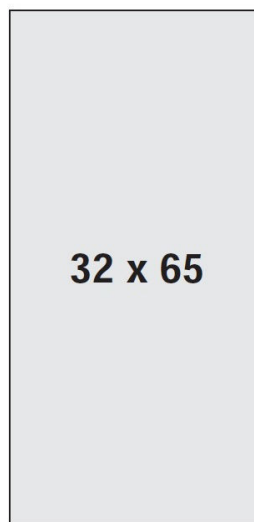
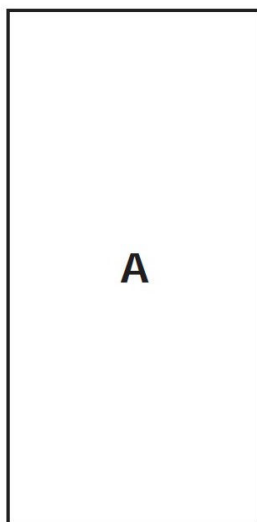
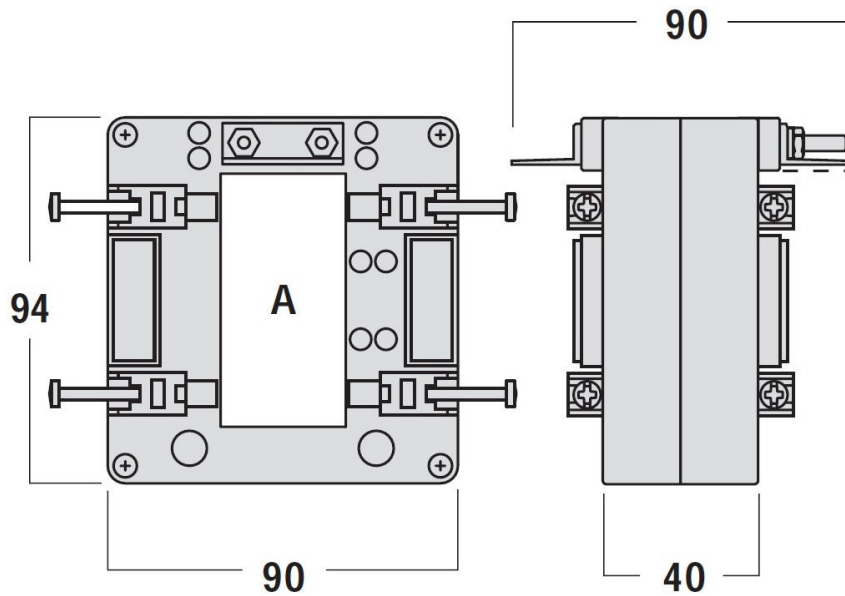
Intended use	for copper bars up to 65 x 32mm
Szabvány	BS3938 EN 61869-2 BS7626
Kivágás mérete (mm)	65x32
Specifications	
Rated current primary side I _{pr} (A)	1500
Rated frequency (Hz)	50
Rated current secondary side I _{sr}	5A
Tokozat	
Housing material	Polycarbonate, self-extinguishing Class V0 according to UL-94

Technische Daten - Fortsetzung

Védettségi fokozat	IP20 with terminal cover IP00 terminals
Tömeg g	750
Szerelés	by fixing screws on the busbar
Csatlakozás	
Winding secondary side	Screw terminals M4
Accuracy classes	
Burden	Class 3 (30VA) Class 1 (25VA) Class 0.5 (20VA)

Schaltbild



Maßbild

SCHRACK Technik GmbH, AT-1235 Wien, Seybelgasse 13
www.schrack.com

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Felfűzhető áramváltó 1500A/5A, 65x32mm sínhez	MG957150-A
Primer áram 1500A, Védettségi fokozat IP00 terminals,IP20 with terminal cover, Osztály 0,5	
Választható tartozék	
MGX fogyasztásmérő 1A/5A, 3P, 2 tarifa, MID	MGX20006
Az áramváltó áttétel beállítására csak egyszer van lehetőség, később nem módosítható! 2 irányú mérés	
MGX fogyasztásmérő 1A/5A, 3P, 2 tarifa, MID, M-bus	MGX20306
Az áramváltó áttétel beállítására csak egyszer van lehetőség, később nem módosítható! 2 irányú mérés	
MGX fogyasztásmérő 1A/5A, 3P, 2 tarifa, MID, Modbus	MGX20406
Az áramváltó áttétel beállítására csak egyszer van lehetőség, később nem módosítható! 2 irányú mérés	