

Datenblatt für Artikel: AT181060--

Sorolható szekrény 1 ajtós IP55 1800x1000x600mm acéllemez

sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle



SCHRACK-Info

- **Material** : Frame: 1.5 mm sheet steel. Doors: Single door and double door: 1.5 mm sheet steel. Rear-, roof- and side-panels: 1.2 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments
- **Bottom plates** : 1.5 mm galvanised sheet steel, consists of
 - three-part bottom plate at depths 400 and 500 mm and
 - four-part bottom plate at depth 600 mm
 - five-part bottom plate at depth 800 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges for right-hand opening (= hinged right). Doors for left-hand opening (= hinged left) have to be ordered separately. On double door enclosures, hinges are not reversible. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and half cylinder lock 5333 (identical key), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided

- **Side panels** : ATSW... supplied in pairs as accessory
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door IP55 and double door IP54
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Frame with fitted door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure to enable baying while still on the pallet. All packing material is recyclable. In 400 mm wide enclosures a mounting plate, bottom plates and door frame are not included
- **Mounting requirement** : Standard delivery ready for combined installation. For stand-alone installation add side panels



Technische Daten


Nettó szélesség (mm)	1.000,00
Nettó magasság (mm)	1.800,00
Nettó mélység (mm)	600,00
Nettó tömeg (kg)	140,80
Min. környezeti hőmérséklet (°C)	-20
Max. környezeti hőmérséklet (°C)	70
Védettségi fokozat	IP55
Érintésvédelmi osztály	I
Anyag	acéllemez
Szín	RAL 7035 (világos szürke)
Szélesség (mm)	1000
Magasság (mm)	1800
Mélység (mm)	600
Vázszerkezet anyagvastagság (mm)	1,50
Szerelőlap	horganyzott acéllemez, 3mm
Szerelőlap szélesség (mm)	888
Szerelőlap magasság (mm)	1688
Szerelőlap mélység (mm)	3
Ajtó falvastagság (mm)	1,50
Feneklemezek száma	4
Load capacity per door (kg)	50
Ajtók száma	1
Feneklemez szélesség (mm)	755
Load Capacity Roof Panel (kg)	20
Load Capacity Side Panel (kg)	60
Típus	sorolható szekrény
Total Load Capacity (kg)	1000
Mounting Plate Load Capacity (kg)	500

Technische Daten - Fortsetzung

Veszteségi teljesítmény (W)

-1021,00

Dimension drawing

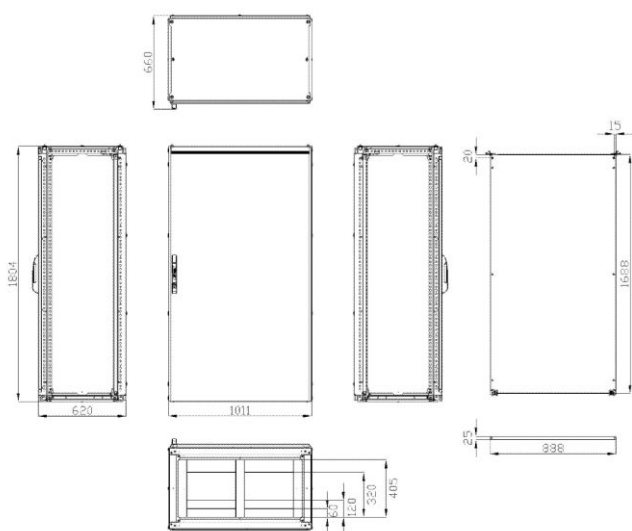

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Sorolható szekrény 1 ajtós IP55 1800x1000x600mm acéllemez sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle	AT181060
Választható tartozék	
LED ligh for EC, infra (not available in this country)	IU006519CZ
Oldallap 1800x600mm, 1 pár, 1,2mm vastag acél RAL7035	ATSW1806
Lábazati sarokelem (4 db) Ma=100mm, ABS, RAL7012	ATSOC104
Lábazati sarokelem (4 db) Ma=200mm, ABS, RAL7012	ATSOC204
Lábazati oldalelm 600x100mm, acél, RAL7012, cse.=2 db	ATSOT061
Lábazat elő- és hátlap 1000x100mm RAL7012, PU=2 pieces	ATSOB101
Összeépítő készlet belső és külső összeépítő elemekkel tömítéssel, csavarokkal, konzolokkal, emelőszemekkel	ATCCI060
Horganyzott emelőszem M12 AC és KC szekrény emeléséhez 4db	ACLE9301
Műanyag öntapadós tervtartó A4	ASDRA400

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Választható tartozék	
DIN-sín alacsony, perforálatlan, horganyzott Ár darabonként	BK14004--B
DIN sín, perforált, Hossz=2000 SZÉ=35 MA=7,5mm Preis pro Stück	BK14005--A
DIN-sín magas, nem perforált, horganyzott Ár darabonként	IL14035--A
DIN-sín magas, perforált, 18x6.3mm horganyzott Ár darabonként	IL14037