

Datenblatt für Artikel: DTWI126042

# Kommunikációs fali szekrény, IP55 beltéri, 663x600x450, 12U

19", RAL7035, fém ajtó



## SCHRACK-Info

Network wallmount 19" IP55 Indoor Cabinets are designed for industrial applications. Based on EN60529 provides IP55 protection class against dust and water ingress.

The enclosure provides IP55 protection against dust and water.

After installation of fans or filters, IP54 is still met.

Application areas are semi-open areas like factories, warehouses, lean-to roof conditions, without no direct rain and environmental effects. Totally gasketed doors, IP55 performing swing handle locking with 3 point locking system and isolated cable entries provide best performance for water and dust ingress.

1,5 mm thick material monoblock welded construction, with epoxy polyester type powder coating which is RAL7035 Light Grey color, provides the corrosion resistance.

Passive ventilation via filtered inlets.

## TECHNICAL DATA

- Colour: RAL7035 Light Grey
- Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even under cold/hot weather conditions. The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.
- Height: 12U
- Width: 600mm


- Depth: 450mm
- Maximum Load: 100kg
- Door: Metal door including keyed swing lock handle with 3point locking system provides security and anti-vandal structure, also maintaining the IP55 protection
- Included are 4 pcs. 3,0 mm thick wall mounts with matching washer and screws, as well as a cable entry flange with three glands: 2x PG21, 1 x PG48, 2 x PVC blind caps with 28mm diameter (installed in the floor) and a blind flange (accessory pack).
- Filters are included
- Cabinets are delivered with: 1 set = 2pcs 19" front rails. A second pair of 19" DTWIPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy equipment.




## Technische Daten

|                                         |                           |
|-----------------------------------------|---------------------------|
| Nettó szélesség (mm)                    | 600,00                    |
| Nettó magasság (mm)                     | 663,00                    |
| Nettó mélység (mm)                      | 450,00                    |
| Nettó tömeg (kg)                        | 31,00                     |
| Min. környezeti hőmérséklet (°C)        | 5                         |
| Max. környezeti hőmérséklet (°C)        | 40                        |
| Alkalmazható szekrény szélességhez (mm) | 600                       |
| Magasság (mm)                           | 663                       |
| Szín                                    | RAL 7035 (világos szürke) |
| Leírás                                  | Elosztó                   |


## méretrajz: Kommunikációs fali szekrény, IP55 beltéri, 663x600x450, 12U




Top view

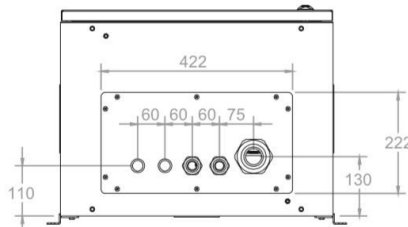


Bottom view

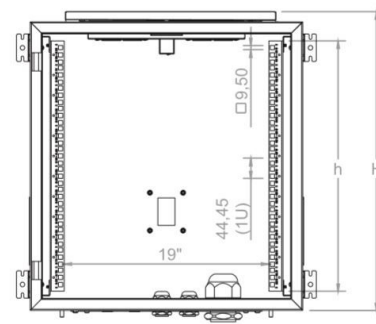


Inside view

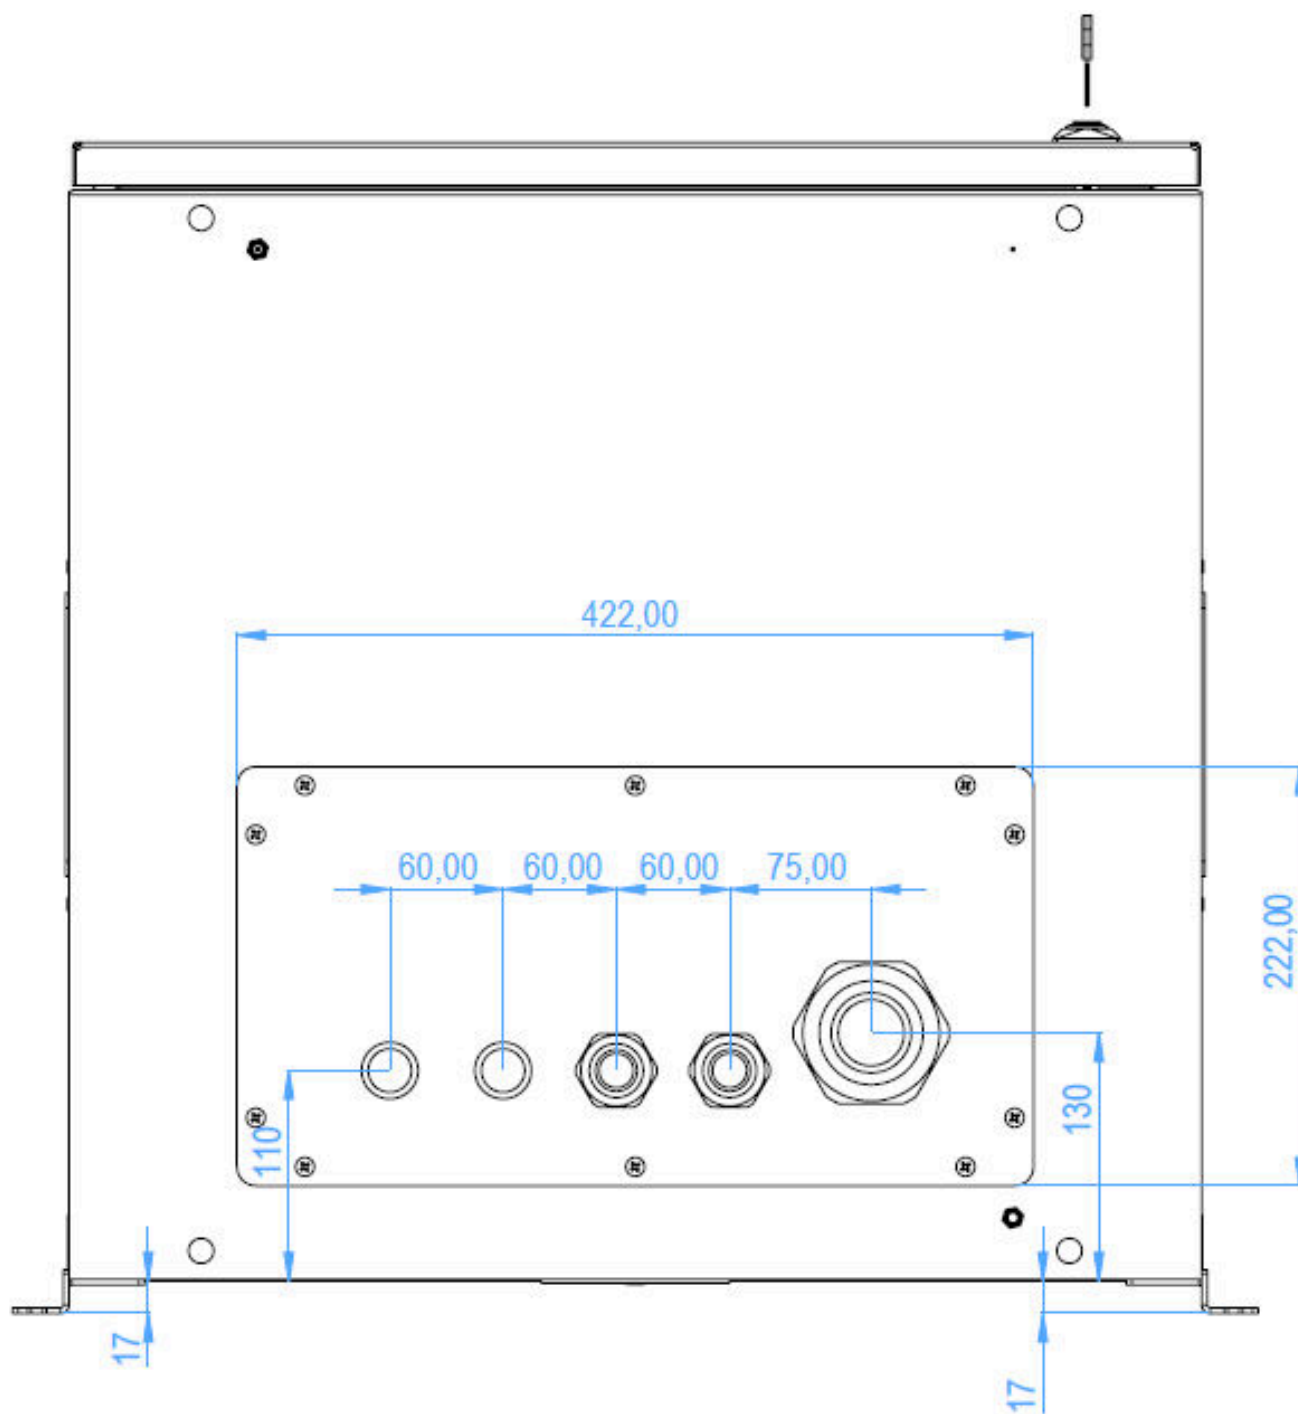
**méretrajz: Kommunikációs falı szekrény, IP55 beltéri, 663x600x450, 12U**

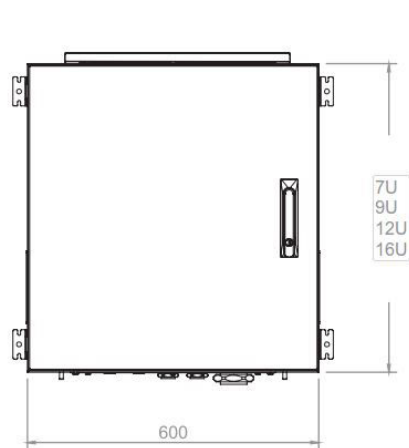**méretrajz: Kommunikációs faliszekrény, IP55 beltéri, 663x600x450, 12U**

Front view




Side view

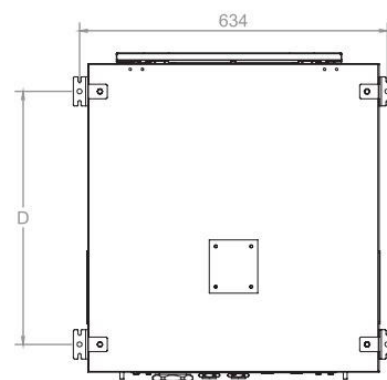


Rear view

**méretajz: Kommunikációs falı szekrény, IP55 beltéri, 663x600x450, 12U**

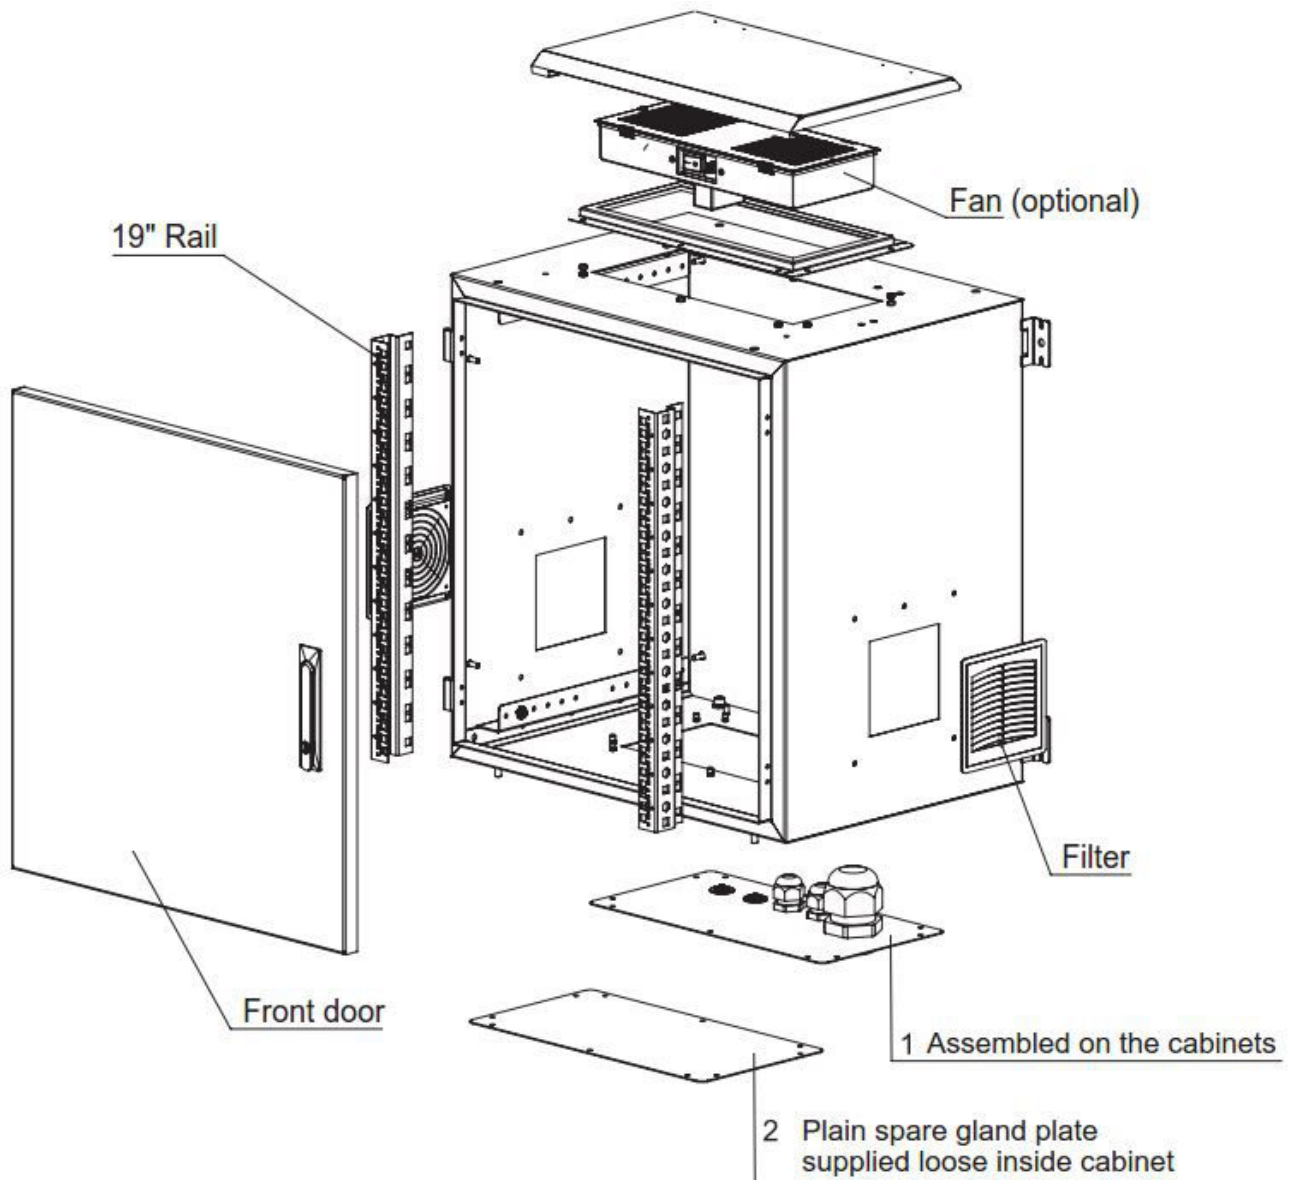

**méretarajz: Kommunikációs faliszekrény, IP55 beltéri, 663x600x450, 12U**

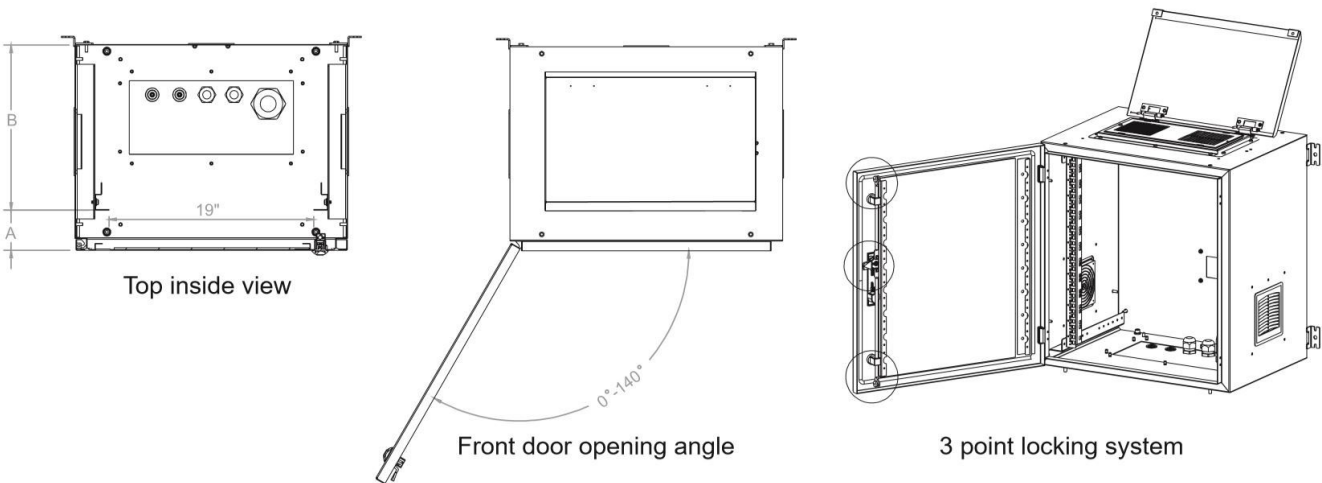

**méretarajz: Kommunikációs faliszekrény, IP55 beltéri, 663x600x450, 12U**

|       | A     |        | B      |        |
|-------|-------|--------|--------|--------|
|       | Min   | Max    | Min    | Max    |
| D=450 | 60 mm | 185 mm | 260 mm | 385 mm |
| D=600 | 60 mm | 335 mm | 260 mm | 535 mm |

**adat táblázat: Kommunikációs faliszekrény, IP55 beltéri, 663x600x450, 12U**

| Typ        | h [mm] | H [mm] | Gewicht Netto [kg] | Gewicht Brutto [kg] |
|------------|--------|--------|--------------------|---------------------|
| DTWI076040 | 311    | 440    | 27                 | 28                  |
| DTWI096040 | 400    | 529    | 30,5               | 31,5                |
| DTWI126040 | 533    | 663    | 33,5               | 34,5                |
| DTWI166040 | 711    | 841    | 37,2               | 38,2                |
| DTWI076042 | 311    | 440    | 25                 | 26                  |
| DTWI096042 | 400    | 529    | 28                 | 29                  |
| DTWI126042 | 533    | 663    | 31                 | 32                  |
| DTWI166042 | 711    | 841    | 37                 | 38                  |

## Artikeltabelle

| BEZEICHNUNG                                                                                                              | BEST.NR.   |
|--------------------------------------------------------------------------------------------------------------------------|------------|
| Kommunikációs fali szekrény, IP55 beltéri, 663x600x450, 12U<br>19", RAL7035, fém ajtó                                    | DTWI126042 |
| <b>Választható tartozék</b>                                                                                              |            |
| Tetőventilátor IP54, 1 ventilátor, ki-be kapcsoló, RAL7035<br>DTWI IP55 fali szekrényhez, szerelés a szekrényen kívülről | DTLTR5521  |
| Tetőventilátor IP54, 2 ventilátor, ki-be kapcsoló, RAL7035<br>DTWI IP55 fali szekrényhez, szerelés a szekrényen kívülről | DTLTR5522  |
| 19" szerelősín készlet, 12U f. S-RACK fali szekrényhez DTWI<br>1 tétel = 2 db                                            | DTWIPROF12 |
| Kihajtható karos zár átalakító készlet S-RACK szekrényhez<br>félcilinderhez                                              | DTZLOCK02  |
| Adapter félcilinder zárbetéthez DTWI szekrényhez<br>DTZLOCK02- szükséges                                                 | DTZLOCK05  |
| Switch 24xRJ45 10/100/1000, csendes, belső tápegység<br>Fémváz, 19"                                                      | QLGSW2457  |
| 19" dugaszolóaljzatsáv, 9 dugaszolóaljzattal, 1U                                                                         | IU070114   |
| 19" dugaljzatsáv 7 dugaljzat+túlfeszültség-védelem 1.25U<br>2m-es csatlakozó vezeték, RAL7035                            | IU070113   |
| 19" PDU, 9x Schuko, switch, 1U, 2m-cable, Black, ALU<br>ALU Profil                                                       | Q7070114-A |
| 19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U<br>2m-cable, Black, ALU                                           | Q7070113-A |