



Datenblatt für Artikel: DW21605D--

Kétrészes kommunikációs faliszekrény, 1035x600x515, 21U

**SCHRACK-Info**

Oldal: 1 / 6

Online erstellt am 2023-09-11, Änderungen und Irrtümer vorbehalten

www.schrack.hu**Get Ready. Get Schrack.**

TECHNICAL DATA

- Steel sheet
- Available heights: 4, 6, 9, 12, 15, 18 and 21 U
- Width: 600mm, Depth: 515/615mm
- Colour: lightgrey RAL 7035
- Degree of protection: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: ca 180°
Fullmetall- and perforated doors available as an option
- Removable sidepanels with lock and keys
- 19" rails (2 pcs.) galvanised, continuously depthadjustable. Numbering of Height-Units (U) by laser for easy readability.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Passive cooling by ventilation slots
- M8- Earthing point in the rear of the cabinet.
- FastOn-Earthing-connections to all dismountable parts pre-installed.
- Including assembly materials:
8 x Cage nuts, bolts and washers M6.
4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- space between front vertical 19"-rail and door glass at max. spacing: W600 – 25mm
- Units of measurement:
Unit (Height Unit): 1 U= 44,45mm, Inch: 1"= 25,4mm, Unit (Height Unit): 1 U= 1,75"

Technische Daten


Nettó szélesség (mm)	600,00
Nettó magasság (mm)	1.085,00
Nettó mélység (mm)	515,00
Nettó tömeg (kg)	34,50
Min. környezeti hőmérséklet (°C)	0
Max. környezeti hőmérséklet (°C)	40
U méret	21U-1035mm

Technische Daten - Fortsetzung


Termék	Data-Enclosures Wallmounting Dualbloc IP20
Tető ventilátor egység opció	nincs
Leírás	tokozat

adat táblázat: Kétrészes kommunikációs fali szekrény, 1035x600x515, 21U

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW06605D--	370	265	516	600	515	324	420	17,3	16,9	20
DW09605D--	500	395	516	600	515	454	420	20,5	20,1	25
DW12605D--	635	530	516	600	515	589	420	23,9	23,5	25
DW15605D--	770	665	516	600	515	724	420	27,4	27	30
DW18605D--	900	795	516	600	515	854	420	30,5	30,1	30
DW21605D--	1035	930	516	600	515	989	420	35,58	35,11	35

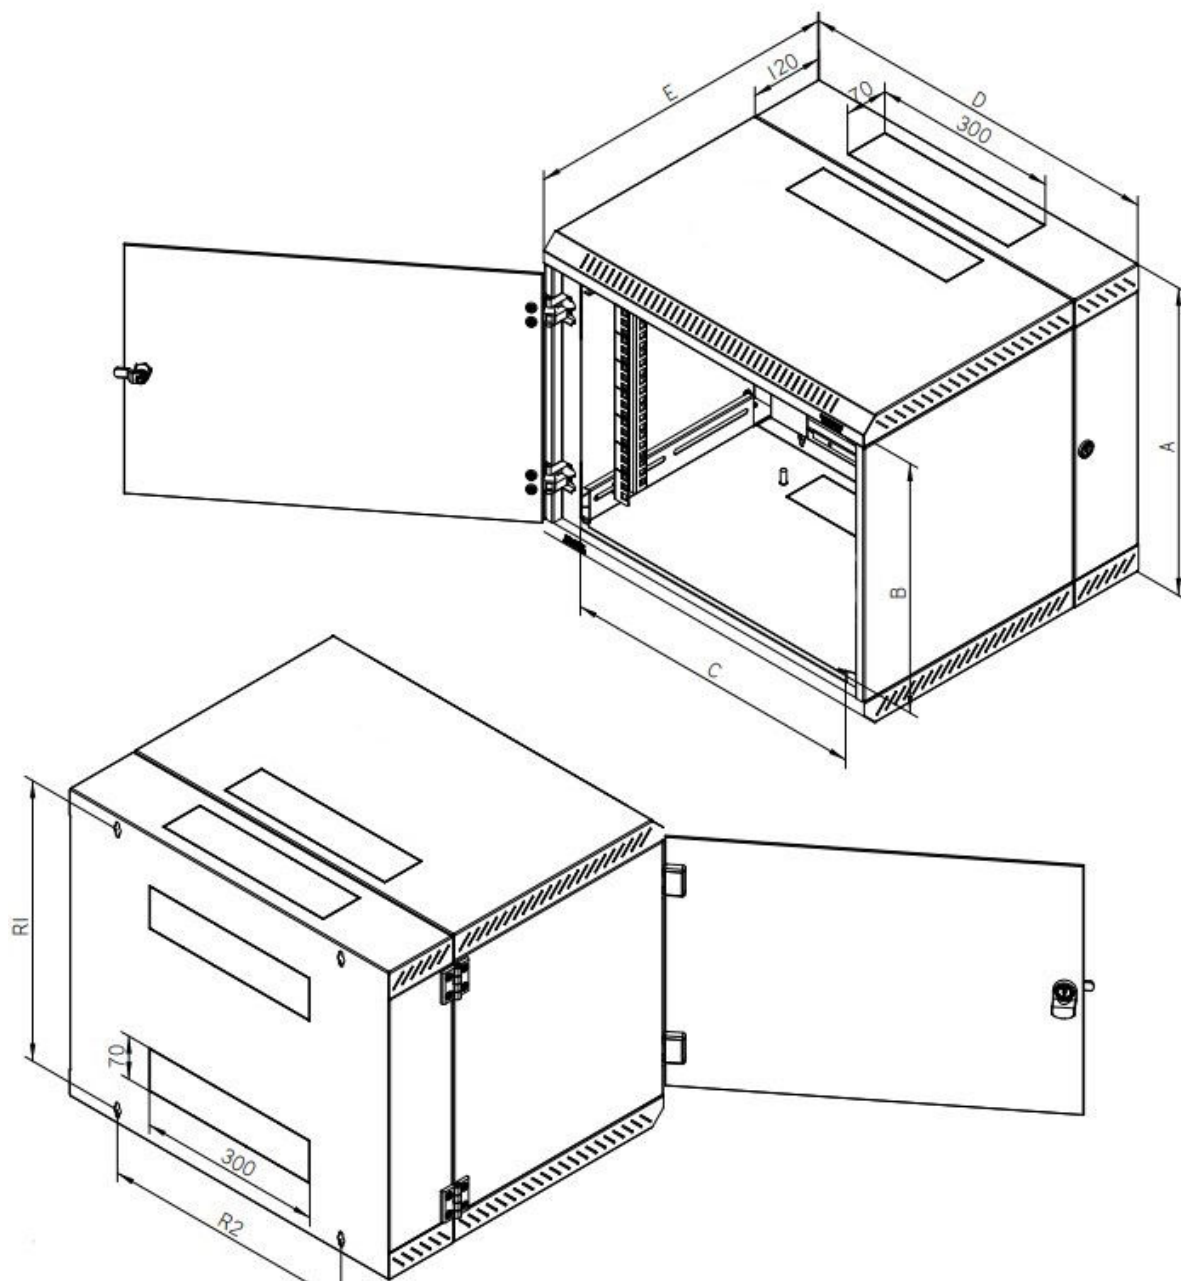méretrajz: Kétrészes kommunikációs fal szekrény, 1035x600x515, 21U

Schnittansicht der vertikalen 19"-Profilschienen

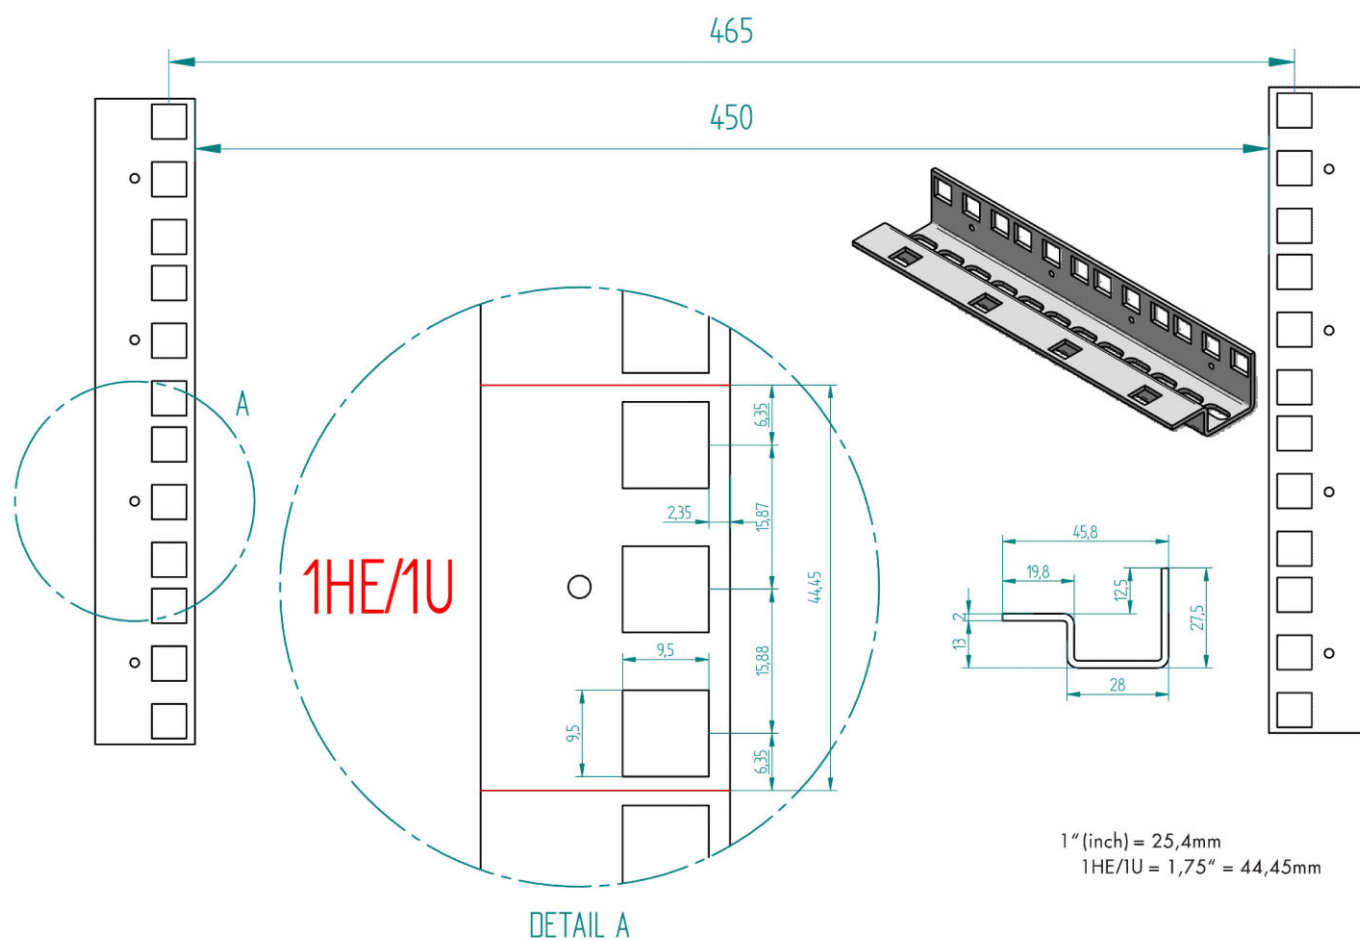

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Kétrészes kommunikációs fali szekrény, 1035x600x515, 21 U	DW21605D
Választható tartozék	
19" fix perforált polc, 1 U, 350mm mély, terhelés: 50kg	DFS14835-C
19" rögzítőelem készlet, 50db (M6 csavar, kosáranya, alátét)	DSSRA050
Szekrényvilágítás, LED 700lm, 19"/mágnes/csavar rögzítés	DV900336-A
19" dugaszolóaljzatsáv, 9 dugaszolóaljzattal, 1 U	IU070114
19" dug.alj.sáv, 8 dugaszolóaljzattal, 1 U, kapcsoló, kábel 2m-es csatlakozó vezeték, RAL7035	IU070124
Üvegajtó DW szekrényekhez 21 Ux600mm széles, zárral Vorbereitung	DWRT2167
19" polctartó készlet DW szekrényhez rögzített oldallappal	DFSZDW01
Switch 24xRJ45 10/100/1000, csendes, belső tápegység Metal-Chassis, 19"	QLGSW2457