

Datenblatt für Artikel: HDCR100172

IS-1 Colocation Enclosure 2-parts 80x220x120 RAL9005 black



SCHRACK-Info

Compartments: 2

U/Compartment: 23

Material:

Basic frame: 1.50mm steel sheet

Doors: 1.50mm steel sheet

Side panels: 1.50mm steel sheet

482.6 mm (19") mounting angles: 2.00mm steel sheet

Finish:

Frame and cladding parts: powder-coated

Internal fittings: galvanised

Static load capability: 25kg per U

Frame clearance, front: 112mm

Installation depth: 747mm

Equipment:

- 1 basic frame, demountable, with integrated 25-mm mounting hole pitch pattern on all sides
- 4 galvanised 482.6mm (19") mounting angles per compartment for cage nuts acc. to IEC 297 d EIA, including height unit labelling
- Lateral airflow routing panel at front of each compartment
- Per compartment, 1 single wing front door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system
- Per compartment, 1 single wing rear door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system

- 2 double-wing side panels, screw fastened n 1 top cover, single part, solid (only width 600) or with cable entry aperture (on width 800)
- Depending on the version, 2 or 3 solid partition plates
- 1 bottom cover, solid with cable entry apertures, depending on the model
- 1 or 2 cable ducts for B600 / 2 or 4 cable ducts for B800
- 4 levelling feet, incl. protective caps (provided)
- 1 earthing set, mounted (all flat components earthed, central earthing point)

Inspections/Norms


- Earthing in acc. with DIN VDE 0100-540
- Components in acc. with IEC 297-1/2 (19")

Technische Daten

Nettó szélesség (mm)	800,00
Nettó magasság (mm)	2.200,00
Nettó mélység (mm)	1.200,00
Szín	RAL 9005 (mélyfekete)
U	46
Nettó tömeg (kg)	165,00
Min. környezeti hőmérséklet (°C)	-10
Max. környezeti hőmérséklet (°C)	60
Védettség fokozat	IP20

méretrajz: IS-1 Colocation Enclosure 2-parts 80x220x120 RAL9005 black

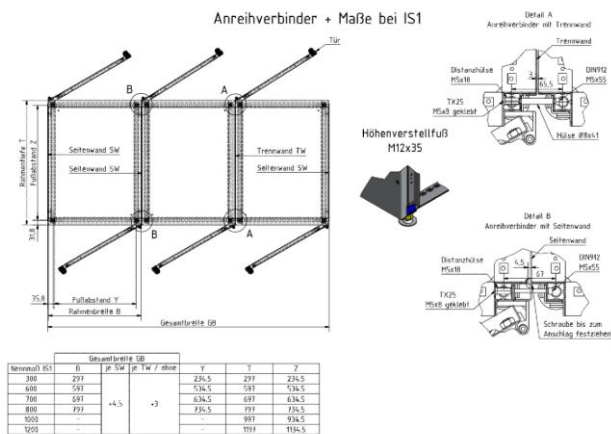

méretajz: IS-1 Colocation Enclosure 2-parts 80x220x120 RAL9005 black

Personnel	IS1	Gutward breite (SB)			Y	Y	Z
		fl	je SW	je TW / ohne			
300	297	+4,5	+3	234,5	297	234,5	
600	597			534,5	597	534,5	
700	697			634,5	697	634,5	
800	797			734,5	797	734,5	
1000	-			-	997	934,5	
1200	-	-	-	1197	1134,5		

BEZEICHNUNG	BEST.NR.
IS-1 Colocation Enclosure 2-parts 80x220x120 RAL9005 black	HDCR100172