

Datenblatt für Artikel: HDCR100183

# IS-1 Colocation Enclosure 3-piece 80x200x120 RAL7035

lightgrey



## SCHRACK-Info

**Compartments:** 3

**U/Compartment:** 13

**Material:**

Basic frame: 1.50mm steel sheet

Doors: 1.50mm steel sheet

Side panels: 1.50mm steel sheet

482.6 mm (19") mounting angles: 2.00mm steel sheet

**Finish:**

Frame and cladding parts: powder-coated

Internal fittings: galvanised

**Static load capability:** 25kg per U

**Frame clearance, front:** 112mm

**Installation depth:** 747mm

**Equipment:**

- 1 basic frame, demountable, with integrated 25-mm mounting hole pitch pattern on all sides
- 4 galvanised 482.6mm (19") mounting angles per compartment for cage nuts acc. to IEC 297 d EIA, including height unit labelling
- Lateral airflow routing panel at front of each compartment
- Per compartment, 1 single wing front door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system

- Per compartment, 1 single wing rear door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system
- 2 double-wing side panels, screw fastened n 1 top cover, single part, solid (only width 600) or with cable entry aperture (on width 800)
- Depending on the version, 2 or 3 solid partition plates
- 1 bottom cover, solid with cable entry apertures, depending on the model
- 1 or 2 cable ducts for B600 / 2 or 4 cable ducts for B800
- 4 levelling feet, incl. protective caps (provided)
- 1 earthing set, mounted (all flat components earthed, central earthing point)


#### Inspections/Norms

- Earthing in acc. with DIN VDE 0100-540
- Components in acc. with IEC 297-1/2 (19")

## Technische Daten

|                                  |                           |
|----------------------------------|---------------------------|
| Nettó szélesség (mm)             | 800,00                    |
| Nettó magasság (mm)              | 2.000,00                  |
| Nettó mélység (mm)               | 1.200,00                  |
| Szín                             | RAL 7035 (világos szürke) |
| U                                | 39                        |
| Nettó tömeg (kg)                 | 165,00                    |
| Min. környezeti hőmérséklet (°C) | -10                       |
| Max. környezeti hőmérséklet (°C) | 60                        |
| Védettségi fokozat               | IP20                      |

## méretrajz: IS-1 Colocation Enclosure 3-piece 80x200x120 RAL7035

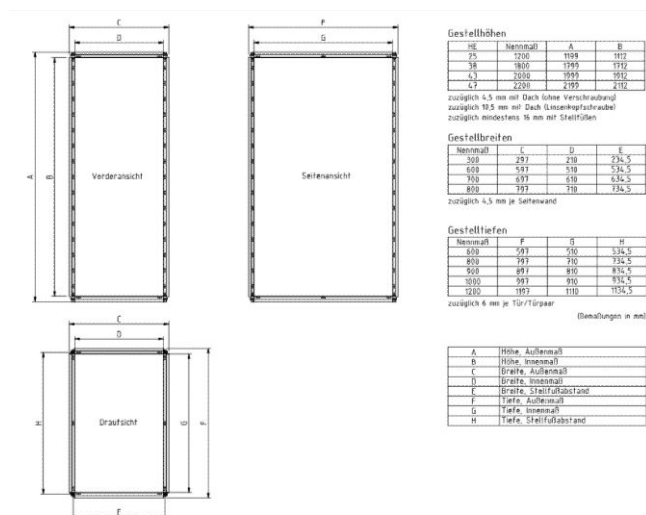

**méretrajz: IS-1 Colocation Enclosure 3-piece 80x200x120 RAL7035**



| BEZEICHNUNG                                          | BEST.NR.   |
|------------------------------------------------------|------------|
| IS-1 Colocation Enclosure 3-piece 80x200x120 RAL7035 | HDCR100183 |
| lightgrey                                            |            |