


Datenblatt für Artikel: HLP29LM00F

Opt. patchkábel duplex LC/UPC - LC/APC, 9/125µm OS2, LSOH

Sárga, 0.5m

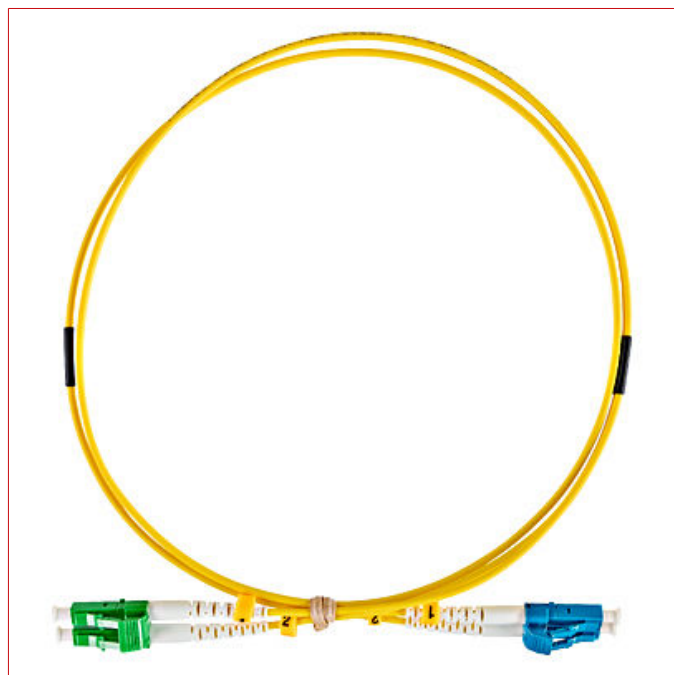

SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS


- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks

- ATM, SONET and WDM

Technische Daten

Szabvány	IEC 61300-3-4 / IEC 61300-3-6
Csatlakozó szabvány	IEC 61754
Csatlakozó kombináció	LC UPC/LC APC
Patchkábel hossz (m)	0,50
Szál	9/125 μ OS2 monomódusú
Kábel köpeny	LSOH
Szín	sárga
Átmérő (mm)	2 x 2,2
Jellemző bemeneti veszteség (dB)	$\leq 0,25$
Jellemző visszaverődési veszteség (dB)	APC ≥ 60 / UPC ≥ 50
Min. környezeti hőmérséklet (°C)	-20
Max. környezeti hőmérséklet (°C)	60
Nettó szélesség (mm)	150,00
Nettó magasság (mm)	200,00
Nettó tömeg (kg)	0,04

méretrajz: Opt. patchkábel duplex LC/UPC - LC/APC, 9/ 125 μ m OS2, LSOH

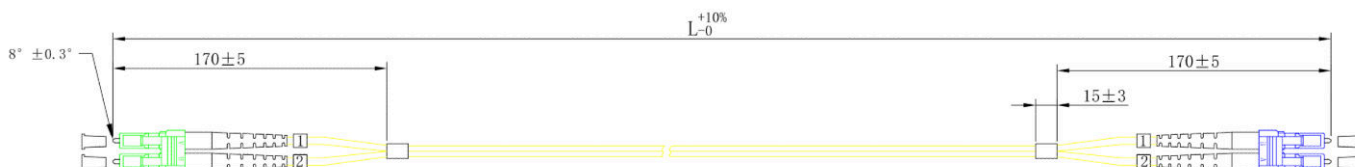

BEZEICHNUNG	BEST.NR.
Opt. patchkábel duplex LC/UPC - LC/APC, 9/ 125 μ m OS2, LSOH	HLP29LM00F
Sárga, 0.5m	