






Datenblatt für Artikel: HSELS245CG

Optikai rendező 24szálas, SC, 50/125µm OM2, kihúzható, 19", 1U

acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing,
PREMIUM

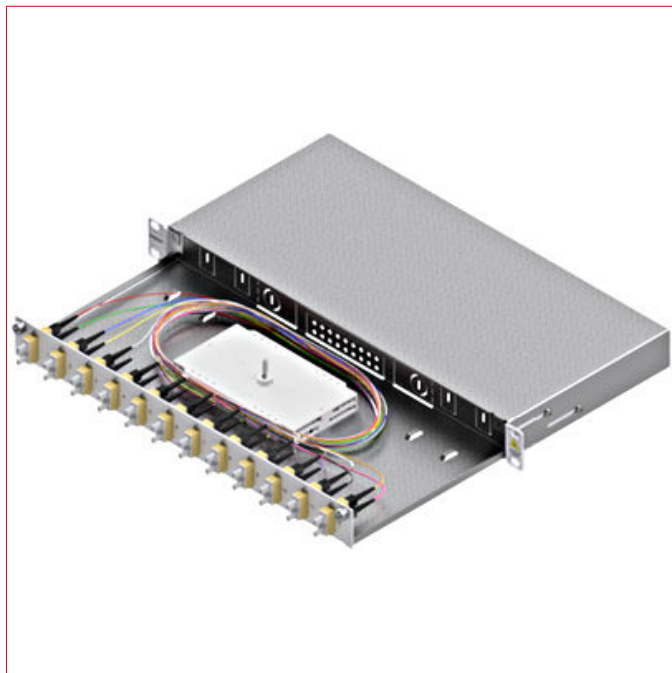

SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open




Standards:

50173-1, EN 61300-3-6, EN 61300-3-85

Technische Daten

Nettó szélesség (mm)	482,50
Nettó magasság (mm)	43,60
Nettó mélység (mm)	211,50
Nettó tömeg (kg)	2,70
Szál	50/125 μ OM2 multimódusú
Szín	RAL 7035 (világos szürke)
Min. környezeti hőmérséklet (°C)	-10
Max. környezeti hőmérséklet (°C)	70
Szálszám	24
Toldó/csatlakozó	SC

Dimension drawing

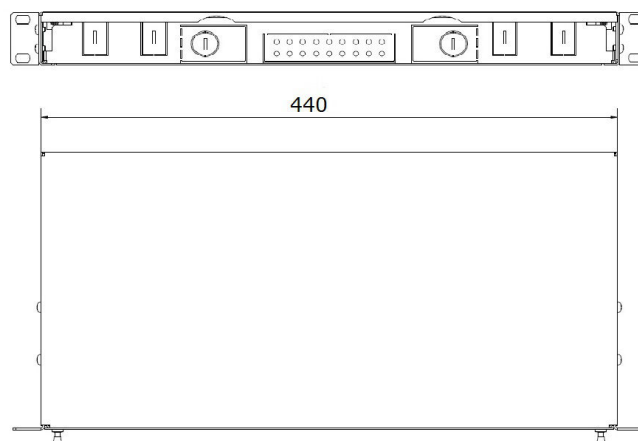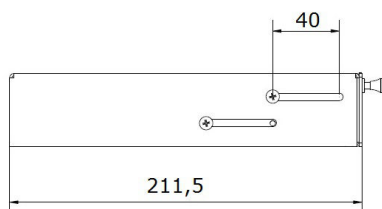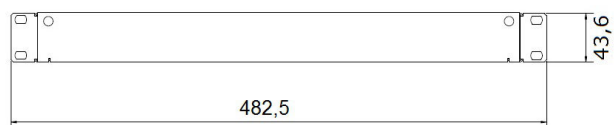

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optikai rendező 24szálas,SC,50/125µm OM2, kihúzható, 19", 1U acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM	HSELS245CG
Választható tartozék	
Optikai hegesztésvédő zsugorcső, 60mm	HELSP00011
Optikai hegesztésvédő zsugorcső, 40mm	HELSP00010