



Datenblatt für Artikel: HSELT249HP

FO Splicebox MA14 24LSH/PC (Compact), 9µm, OS2, 19", 1U

RAL7035, PREMIUM

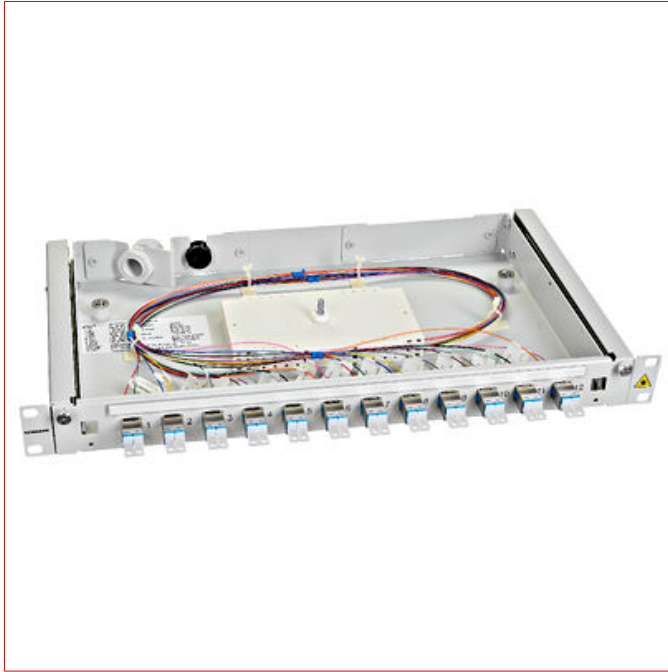

SCHRACK-Info

DESCRIPTION

- Material: Steel sheet, powdered RAL7035
- Telescopic extension
- LSH (identical in construction to E2000®) Breakouts arranged in a row
- rear left oblique/straight outlet with 1x PG16 and blind plug for right/left mounting
rear right closed with blind cover
- Threaded bushing for strain relief (both sides, screwed)
- Anti-rotation device for splice cassette
- Labeling strip screwed
- 2pcs. cable guide bracket for front mounting enclosed, black
- Front panel numbered (1 - 12)
- Box lid screwed to the side
- Laser symbol printed on angle right, Schrack Technik logo printed on left

EQUIPMENT

- 12x LSH Compact couplers (identical in construction to E2000®) mounted with assembly clip (snap-in) for 1.5mm sheet thickness
- 24x LSH (identical in construction to E2000®) pigtails, inserted, plugged in and prepared for splicing
- 1x PG16 screw connection

- 4x Drillers glued (fiber guide rings)
- 2x splice cassette + cover
- 1x cable support with cable comb for pre-assembled cables included

SPLICE CASSETTE

- 2pcs. with 2 integrated 12-fold splice combs for shrink splice protection and cover
Brand Schrack Technik: 2x HSELSZSK01 + 2x HSELSZSK05 + 1x HSELSZSK03

COUPLER

- LSH Compact (identical in construction to E2000®)
 - Singlemode: Brand s4u
 - Order code: 910140

PIGTAILS

- LSH (identical in construction to E2000®)
 - Singlemode: Brand s4u UPC
 - Order code: LW008153
- Fiber:
 - Length: 2m
 - Singlemode: Brand Corning® SMF-28+ // ITU-T G.657.A1 and fully conform with ITU-T G.652.D

STANDARDS

- EN 50173-x
- IEC 61753-1
- IEC 61300-3-34


Technische Daten

Nettó szélesség (mm)	483,00
Nettó magasság (mm)	44,00
Nettó mélység (mm)	290,00
Nettó tömeg (kg)	2,48
Szál	9/125 OS2 Singlemode / G.652.D / G.657.A1
Szín	RAL 7035 (világos szürke)
Min. környezeti hőmérséklet (°C)	-10
Max. környezeti hőmérséklet (°C)	70
Szálszám	24
Toldó/csatlakozó	LSH (identical in construction to E2000®)

adat táblázat: FO Splicebox MA14 24LSH/PC (Compact), 9µm, OS2, 19", 1U

	Singlemode
	Typisch
	[dB]
Einfügedämpfung (IL)	< 0,12
Rückflusdämpfung (RL)	> 50

méretajz: FO Splicebox MA14 24LSH/PC (Compact), 9µm, OS2, 19", 1U

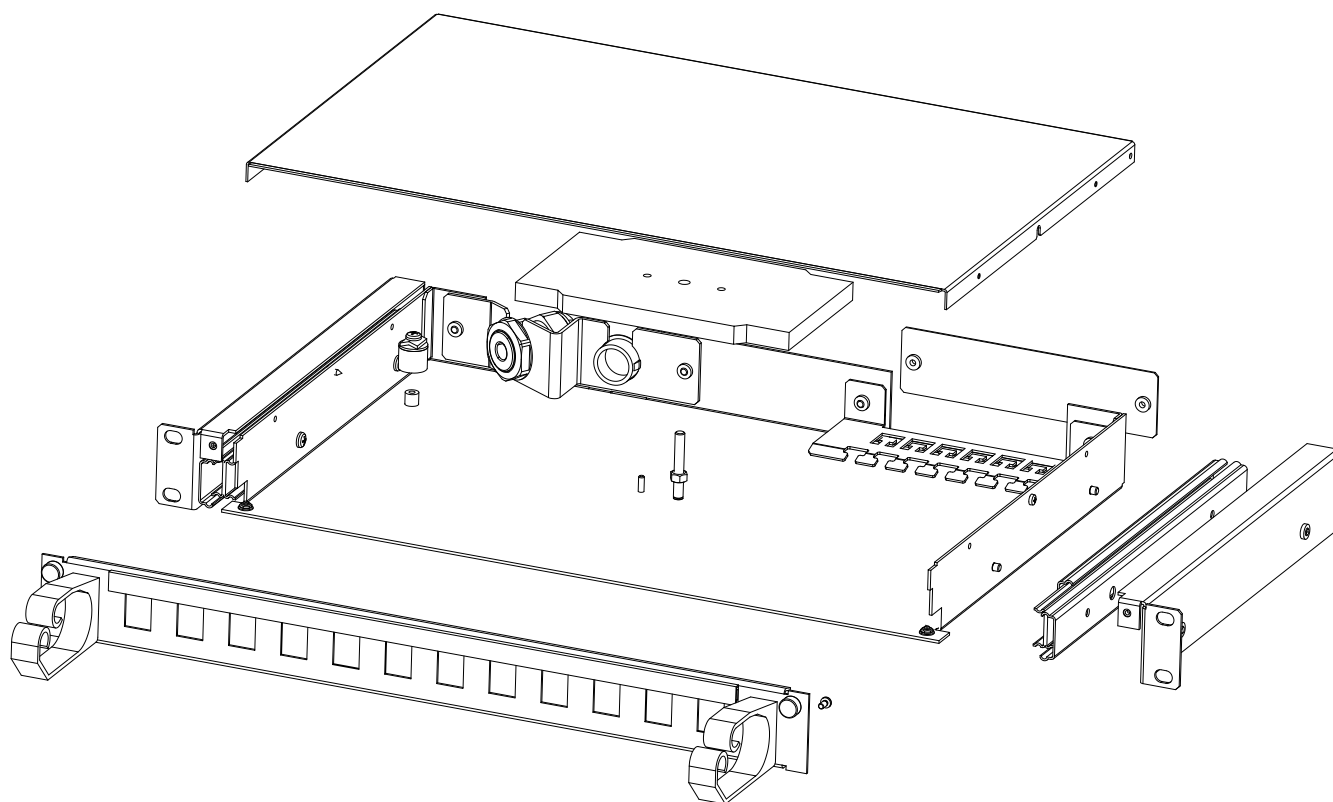

Artikeltabelle

BEZEICHNUNG	BEST.NR.
FO Splicebox MA14 24LSH/PC (Compact), 9µm, OS2, 19", 1U RAL7035, PREMIUM	HSELT249HP
Választható tartozék	
Univerzális opt. kábel 24x9/125µm OS2, LS0H-3, Dca FO A/I-DQ(ZN)BH, nemfémes rágcsálóvédelem, fekete, 8mm, 3500N	HSIAIBH249
Optikai hegesztésvédő zsugorcső, 60mm	HELSP00011
Optikai hegesztésvédő zsugorcső, 40mm	HELSP00010