


Datenblatt für Artikel: IL413545-A

Zählerverteiler Einsatz 5-45E, 5 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

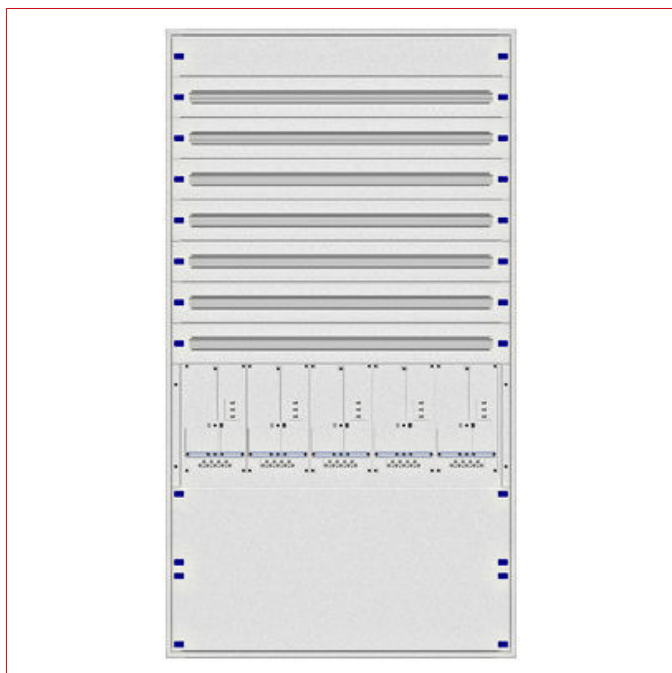

Technische Daten

Nettó szélesség (mm)	1.140,00
Nettó magasság (mm)	2.070,00
Nettó mélység (mm)	150,00
EAN-CODE	9004840966961
Típus	mérőszekrény betét
Változat	Tirol
Betét elemek	fém homloklapok
Szín	RAL 7035
Mérőhely szélesség	5
U	45
Mérő sor	1
Mérőhely	5
Fogyasztásmérő sorok	7
Homloklap	acéllemez
Leírás	Betét
Modul szélesség	399

Artikeltabelle

BEZEICHNUNG	KUPFERGEWICHT (kg/km)	BEST.NR.
Zählerverteiler Einsatz 5-45E, 5 Zählerplätze, Tirol Frontblende Stahlblech, komplett		IL413545-A
Választható tartozék		
Földelő készlet 6mm ² , L=300mm, csavarokkal		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824