

Datenblatt für Artikel: KT201652--

Kompakt szekrény 2 ajtós, 2000x1600x500mm, RAL 7035

sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle



SCHRACK-Info

- **Material** : Corpus: 1.5 mm galvanised sheet steel. Doors: Single door and double door: 1.5 mm sheet steel. Rear panel: 1.2 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments
- **Bottom plates** : 1.5 mm galvanised sheet steel, consists of
 - two-part bottom plate at depth 300 mm
 - three-part bottom plate at depths 400 and 500 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges for right-hand opening (= hinged right). Doors for left-hand opening (= hinged left) have to be ordered separately. On double door enclosures, hinges are not reversible. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and half cylinder lock 5333 (identical key), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Roof panel** : Removable


- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door IP65 and double door IP54
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure



Technische Daten

Nettó szélesség (mm)	1.600,00
Nettó magasság (mm)	2.000,00
Nettó mélység (mm)	500,00
Nettó tömeg (kg)	260,40
Min. környezeti hőmérséklet (°C)	-20
Max. környezeti hőmérséklet (°C)	70
Védettségi fokozat	IP54
Érintésvédelmi osztály	I
Anyag	acéllemez
Szín	RAL 7035 (világos szürke)
Szélesség (mm)	1600
Magasság (mm)	2000
Mélység (mm)	500
Vázszerkezet anyagvastagság (mm)	1,50
Szerelőlap	horganyzott acéllemez, 3mm
Szerelőlap anyagvastagság (mm)	3
Szerelőlap szélesség (mm)	(2x) 744
Szerelőlap magasság (mm)	(2x) 1888
Ajtó falvastagság (mm)	1,50
Feneklemezek száma	3
Load capacity per door (kg)	50
Ajtók száma	2
Feneklemez szélesség (mm)	1355
Load Capacity Roof Panel (kg)	40
Load Capacity Side Panel (kg)	90
Típus	kompakt szekrény
Total Load Capacity (kg)	1250
Mounting Plate Load Capacity (kg)	500
Veszteségi teljesítmény (W)	-1425,00

méretarajz: Kompakt szekrény 2 ajtós, 2000x1600x500mm, RAL 7035

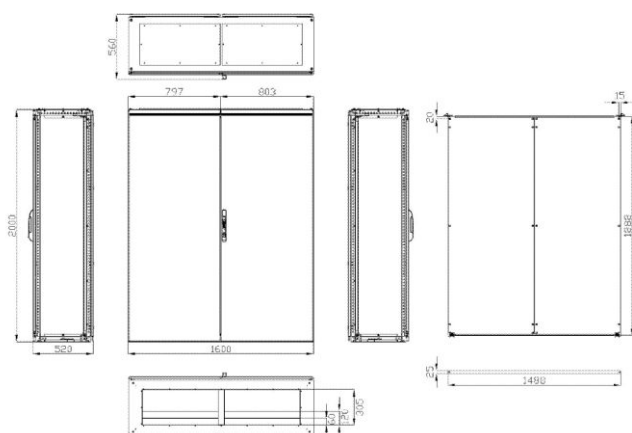

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Kompakt szekrény 2 ajtós, 2000x1600x500mm, RAL 7035	KT201652
sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle	
Választható tartozék	
LED ligh for EC, infra (not available in this country)	IU006519CZ
Lábazati sarokelem (4 db) Ma=100mm, ABS, RAL7012	ATSOC104
Lábazati sarokelem (4 db) Ma=200mm, ABS, RAL7012	ATSOC204
Lábazat oldalelem (1 pár) 500x100mm	ATSOT051
Lábazat elő- és hátlap 1600x100mm	ATSOB161
RAL7012, PU=2 pieces	
Horganyzott emelőszem M12 AC és KC szekrény emeléséhez	ACLE9301
4db	
Műanyag öntapadós tervtartó A4	ASDRA400
DIN-sín alacsony, perforálatlan, horganyzott	BK14004--B
Ár darabonként	
DIN sín, perforált, Hossz=2000 SZÉ=35 MA=7,5mm	BK14005--A
Preis pro Stück	
DIN-sín magas, nem perforált, horganyzott	IL14035--A
Ár darabonként	
DIN-sín magas, perforált, 18x6.3mm horganyzott	IL14037
Ár darabonként	