

Datenblatt für Artikel: MGC55025--

Áramváltó 250/5A 40x10, class 0.5

Primer áram 250A, Burden Class 0.5 (2.5VA)



Technische Daten

Védettségi fokozat	IP20
Burden	Class 0.5 (2.5VA)
Note	Due to dangerous overvoltage and overheating, the Current Transformer is not allowed to be operated with open secondary Side. (EN 60044-1 /A2) As soon as the Measurement Device, the Energy Counter or the Net Analyzer is disconnected, the secondary Side has to be shortcuted!
Intended use	for copper bars up to 40 x 10mm
Szabvány	EN 61869-2
Kivágás mérete (mm)	40x10
Insulation requirements	
Max. Operating voltage Um	0.72kV r.m.s.
Isolation test voltage	3 kV R.M.S. 50 Hz/ 1 min
Isolation	Class B (EN/IEC 61869-1, 61869-2)
Specifications	
Rated current primary side Ipr (A)	250
Rated frequency (Hz)	50-60Hz
Short-time current Ith	< 60Ipr

Technische Daten - Fortsetzung

Thermal rated continuous current according to EN60044-1

Rated dynamic current I_{dyn}	2.5Ith
Rated current secondary side I_{sr}	5A
Tightening torque (Nm)	2
Housing material	Polycarbonate, self-extinguishing


Accuracy classes

Reference temperature (°C)	23°C ±1°C
Load current error	For class 0.5 and 5% I_n : ±1.5% For class 0.5 and 120% I_n : ±0.5% For class 0.5 and 100% I_n : ±0.5% For class 0.5 and 20% I_n : ±0.75%

Working conditions

Hőmérséklet tartomány, szállítás (°C)	-25 to +60
Hőmérséklet tartomány, üzemi (°C)	-5 to +40
Nettó hosszúság (mm)	70,60
Nettó szélesség (mm)	50,40
Nettó magasság (mm)	86,70
Nettó tömeg (kg)	0,21
Min. környezeti hőmérséklet (°C)	-25
Max. környezeti hőmérséklet (°C)	60

Maßbild MGC55025--

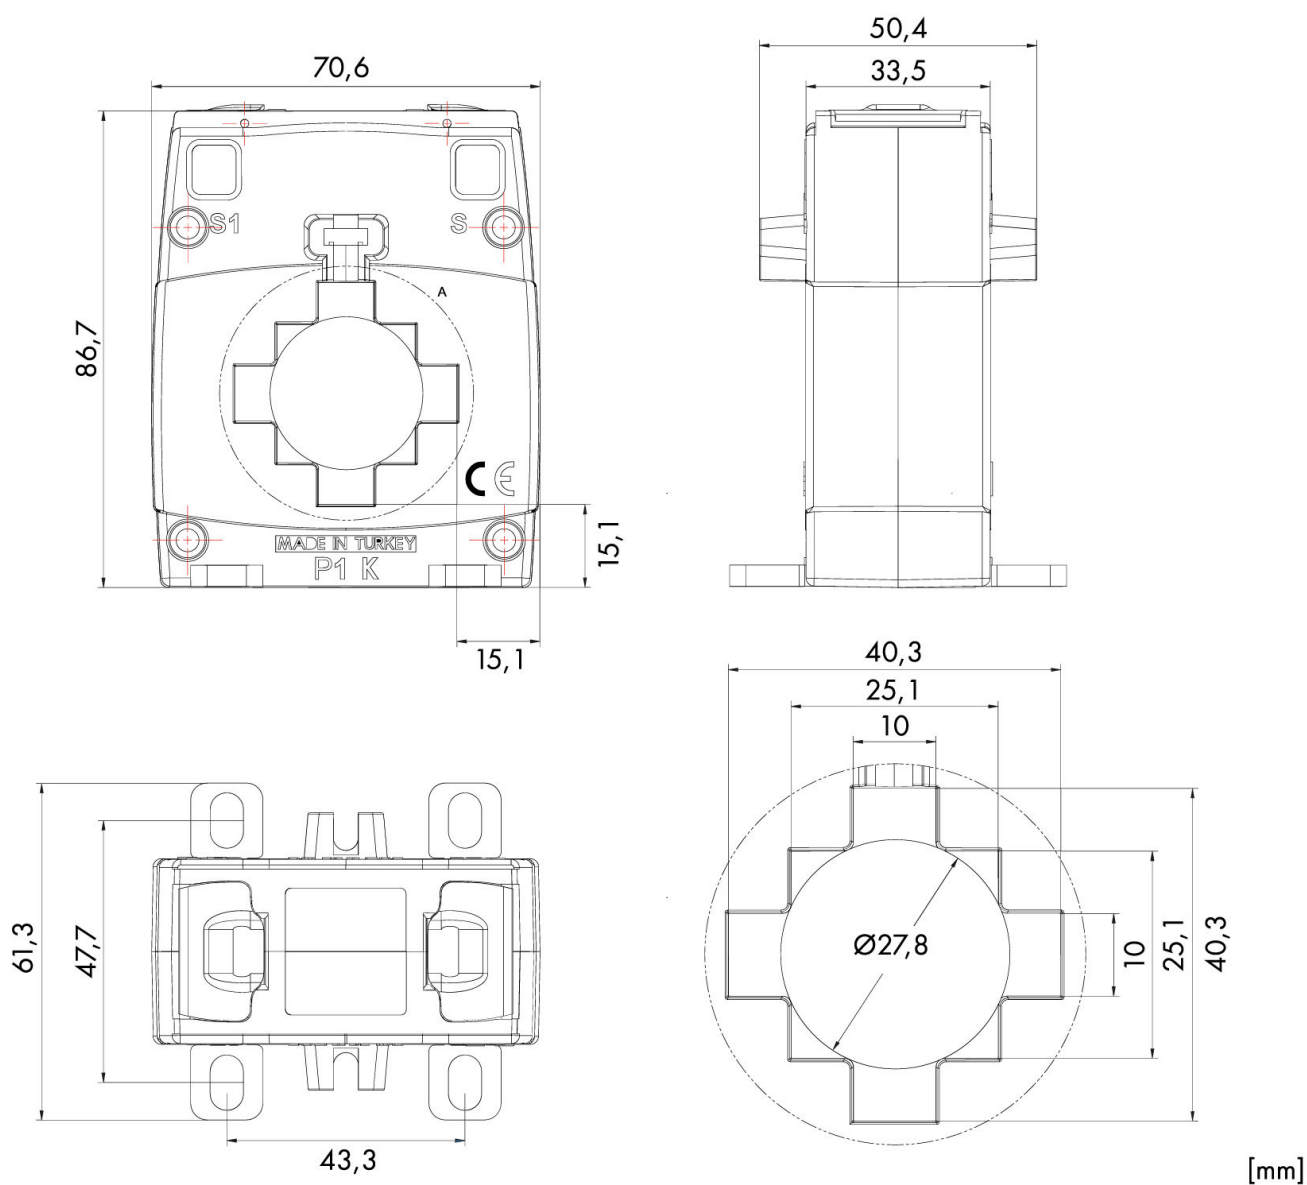

BEZEICHNUNG

Áramváltó 250/5A 40x10, class 0.5
Primer áram 250A, Burden Class 0.5 (2.5VA)

BEST.NR.

MGC55025